




Power Take Offs		Ref. TF4036AMP
Relation 1 : 1,35		
ZF	S5-50 ; S5-90 ; S6-65 ; S6-66 ; S6-70 ; S6-75 ; S6-80 ; S6-90 ; 6S-800 ; 6S-1000 REINFORCED	

To apply with Gear Pumps or with Piston Pumps

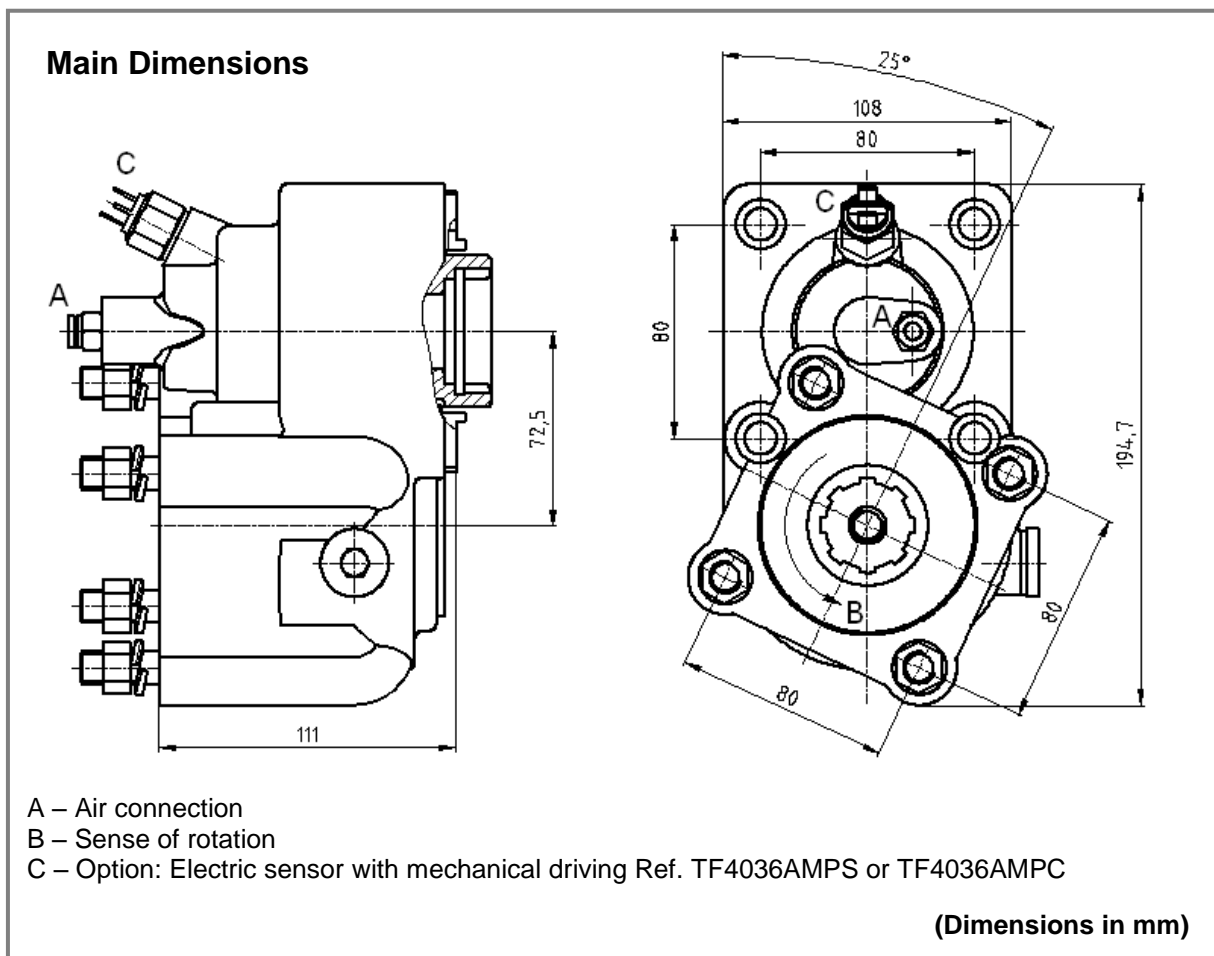

Main Data	
Continuous Torque (Nm)	450
Intermittent Torque (Nm)	500
Power (at 1000 rpm)	62 cv / 46 kW
Mounting Position	Rear
Pump Rotation	Right Hand
Weight (kg)	11
PTO internal ratio	1:1,35
Indicative ratio from motor to PTO's output	
S5-50 / 5.30	.- 1 : 0.882
/ 5.50	.- 1 : 0.830
/ 6.20	.- 1 : 0.736
/ 6.61	.- 1 : 0.689
/ 6.61+GV80 / 5.30	High:.- 1 : 0.860 Normal:.- 1 : 0.689
/ 8.02	.- 1 : 0.570
/ 8.02+GV80 / 6.20	High:.-1 : 0.736 Normal:.- 1 : 0.568

CTI TF4036AMP 1211-2

ABER is constantly engaged in improving its products and, therefore, reserves itself the right to modify without any further notice the characteristics shown. The gear boxes are in constant change; therefore, ABER is not to be held responsible for any damage resulting from wrong application or application of outdated material.



ABER - Embraagens e Comandos Hidráulicos - A. B. LDA
 Rua Francisco de Almeida, Nº 30 – Vila Nova da Telha – 4470 MAIA - Portugal
 Telephone: +351.22.9438070 Fax: +351.22.9420823 e-mail: aber@aber.pt <http://www.aber.pt>



Power Take Offs

Relation 1 : 1,35

Ref. TF4036AMP

ZF

S5-50 ; S5-90 ; S6-65 ; S6-66 ; S6-70 ; S6-75 ; S6-80 ; S6-90 ;
6S-800 ; 6S-1000 REINFORCED

Engine to PTO ratio

S5-90 GPA	- 1 : 1.202		
S6-65 / 6.37	- 1 : 0.878		
/ 6.70	- 1 : 0.837		
/ 7.00+GV70 / 7.67	High: - 1 : 0.616	Normal: - 1 : 0.493	
/ 7.40	- 1 : 0.759		
/ 7.52	- 1 : 0.749		
/ 9.00	- 1 : 0.624		
/ 7.97+GV80 / 6.70	High: - 1 : 0.837	Normal: - 1 : 0.709	
/ 9.00+GV80 / 6.70	High: - 1 : 0.837	Normal: - 1 : 0.624	
/ 9.00+GV80 / 7.52	High: - 1 : 0.748	Normal: - 1 : 0.624	
S6-66 / 7.36-1.0	- 1 : 0.705		
/ 9.06-1.0	- 1 : 0.562		
S6-70 / 6.80	- 1 : 0.694		
/ 6.80+GV70 / 5.71	High: - 1 : 0.826	Normal: - 1 : 0.694	
/ 7.36	- 1 : 0.645		
/ 7.92	- 1 : 0.595		
/ 9.03	- 1 : 0.522		
/ 9.59	- 1 : 0.493		
S6-75 / 6.70+GV80 / 7.52	Normal: - 1 : 0.837	Low: - 1 : 0.748	
S6-80 / 5.03	- 1 : 1.053		
/ 5.66	- 1 : 0.999		
/ 5.66+GV80 / 7.52	High: - 1 : 0.996	Normal: - 1 : 0.751	
/ 6.10	- 1 : 0.929		
/ 6.70	- 1 : 0.837		
/ 6.70+GV80 / 5.30	High: - 1 : 1.062	Normal: - 1 : 0.837	
/ 6.90	- 1 : 0.695		
/ 7.35	- 1 : 0.745		
/ 7.41	- 1 : 0.760		
/ 7.53	- 1 : 0.749		
/ 7.67	- 1 : 0.729		
/ 7.67+GV80 / 6.70	High: - 1 : 0.840	Normal: - 1 : 0.733	
/ 7.90	- 1 : 0.709		
/ 9.00	- 1 : 0.621		
/ 9.00+GV80 / 5.30	High: - 1 : 1.062	Normal: - 1 : 0.624	
/ 9.00+GV80 / 7.48	High: - 1 : 0.759	Normal: - 1 : 0.624	
/ 9.00+GV80 / 7.52	High: - 1 : 0.748	Normal: - 1 : 0.624	
S6-90 / 5.67	- 1 : 1.013		
/ 5.74	- 1 : 0.999		
/ 6.37	- 1 : 0.999		
/ 6.98	- 1 : 0.826		
/ 7.03	- 1 : 0.814		
/ 7.03+GV90 / 5.67	High: - 1 : 1.013	Normal: - 1 : 0.814	
/ 7.03+GV90 / 5.74	High: - 1 : 0.992	Normal: - 1 : 0.810	
/ 7.40	- 1 : 0.776		
/ 9.01	- 1 : 0.635		
/ 9.01+GV90 / 7.40	High: - 1 : 0.774	Normal: - 1 : 0.636	

CTI TF4036AMP 1211-2

ABER is constantly engaged in improving its products and, therefore, reserves itself the right to modify without any further notice the characteristics shown. The gear boxes are in constant change; therefore, ABER is not to be held responsible for any damage resulting from wrong application or application of outdated material.



ABER - Embraiaçgens e Comandos Hidráulicos - A. B. LDA

Rua Francisco de Almeida, Nº 30 – Vila Nova da Telha – 4470 MAIA - Portugal

Telephone: +351.22.9438070 Fax: +351.22.9420823 e-mail: aber@aber.pt <http://www.aber.pt>

2/2